

Specialized Military Dot Sight

Model DT323 Dot Sight

Minimized the weight by eliminating unnecessary portion and compacted the size with simple design. Fits to all MIL STD 1913 Picatinny Rail System. Compatible with every generation of night vision devices. Various mounts could be utilized with 30mm size rings. Flip-up rubber covers not only protect the lens from the dust and sand but also camouflage the reflection of lens for use in the desert and jungle. Our rotary mechanical switch gives you positive setting. The quality of our sights is our primary concern.



〈 Korea Small arms K1, Model DT323 〉




■ UNIQUE FEATURES OF THE MODEL DT323

- Available various sizes of dot from 3 MOA to 6 MOA
- Unlimited field of view
- Reliable and positive mechanical rotary switch
- Flip-up lens covers protect from sand and dust
- Compatible with every generation of NVD
- Rugged and durable construction
- Waterproof and Fogproof



Showing the shooting practice of Korean Special Force wearing our products.

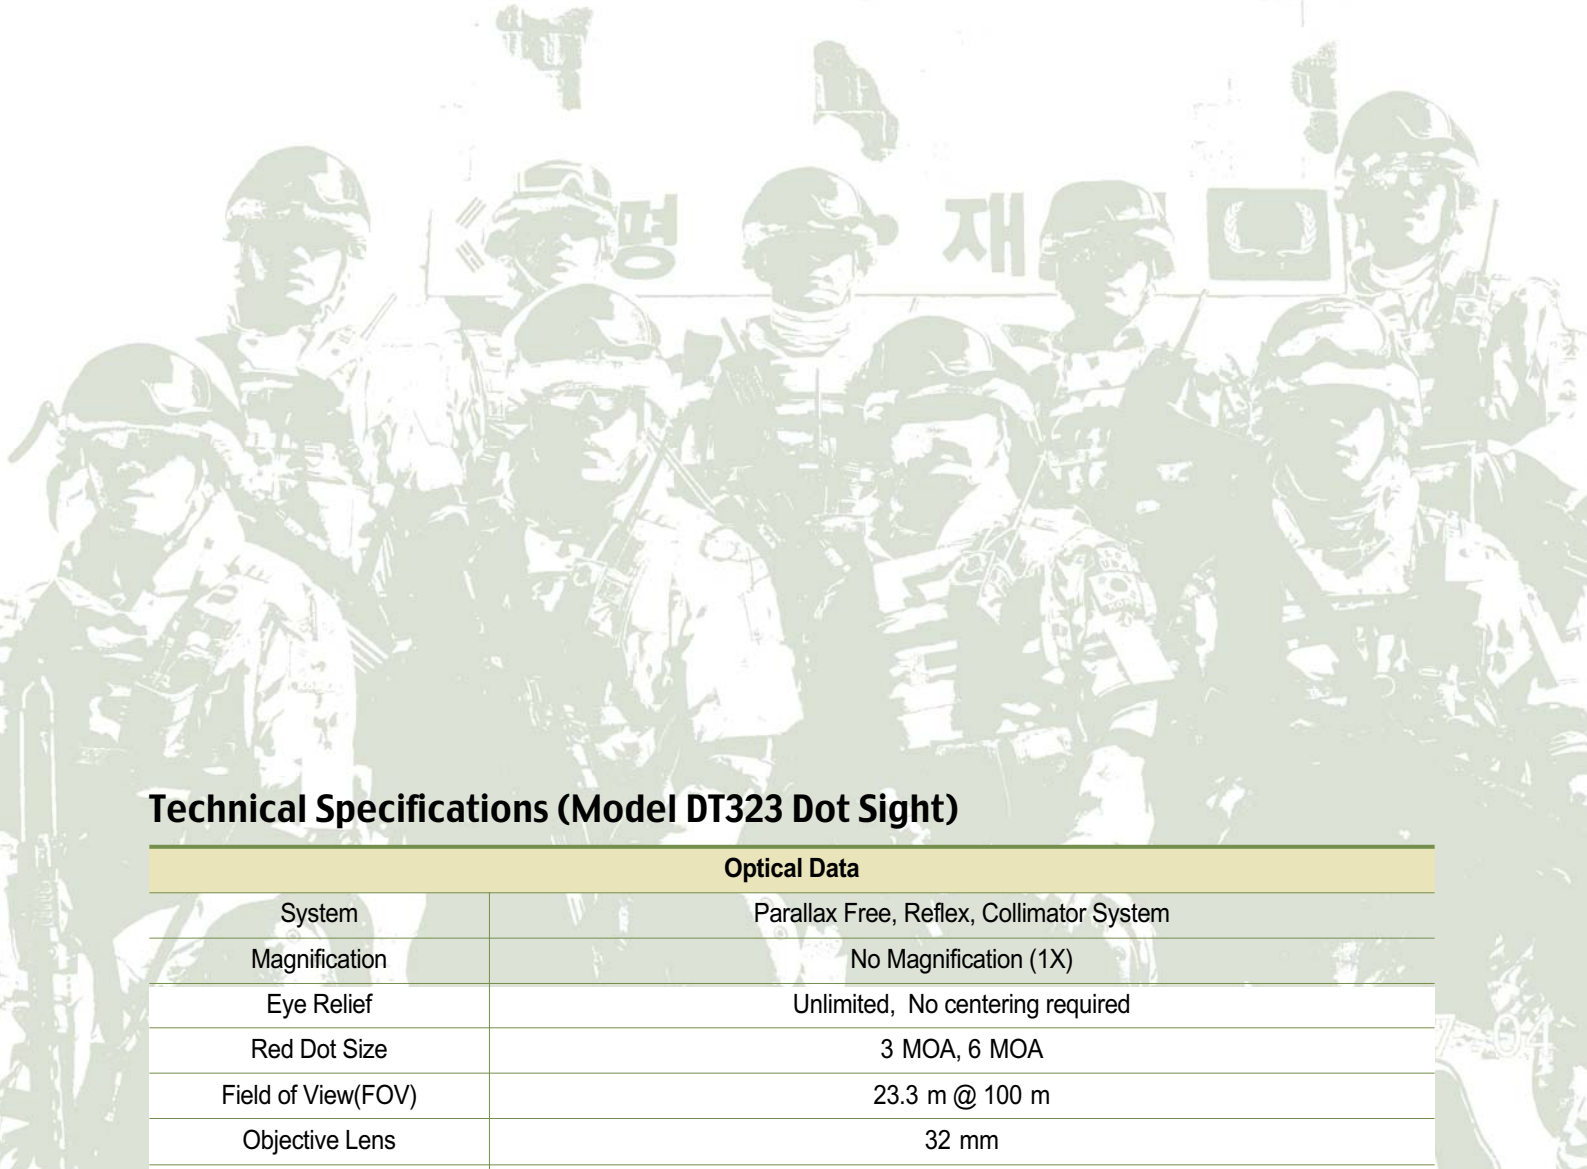

Technical Specifications (Model DT323 Dot Sight)

Optical Data	
System	Parallax Free, Reflex, Collimator System
Magnification	No Magnification (1X)
Eye Relief	Unlimited, No centering required
Red Dot Size	3 MOA, 6 MOA
Field of View(FOV)	23.3 m @ 100 m
Objective Lens	32 mm
Optical Coating	Anti Reflex Coating All Surfaces, Multi-layer Coating for Reflection of Red Light
Electronic Data	
Battery	One CR 2032 3V Lithium Battery
Battery Life	200 hours
Dot Brightness Adjustment	12 Settings : 3 Nightvision Mode, 8 Daylight Mode and 1 Off
Mechanical Data	
Housing Material	High Strength Aluminum
Surface Finish	Hard Anodized, Matte, Carbon Black
Lens Covers Material	Thermoplastic Elastomer, Black Non-Glare
Mountings	For MIL STD 1913 Picatinny Rail (1 Ring 30 mm \varnothing)
Click Adjustment	1 click = 8 mm at 100 m
Dimensions	
Length/Width/Height	132 mm / 63 mm / 77 mm
Weight	320 g (with Mount)
Environmental Data	
Temp. Range	-51°C ~ +71°C

• Specification may change without notice.